



PC EBOH 1051841

IB04151841



INVESTOR IN PEOPLE

REC'D 14 OCT 2004

WIPO

PCT


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

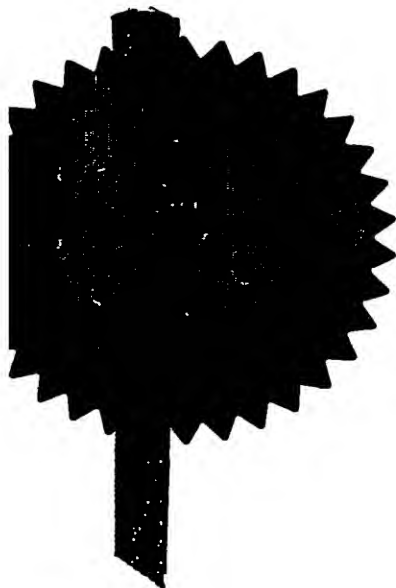

Signed

Dated 17 June 2004

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



The
Patent
Office

1/77

Request for grant of a patent
(See notes on the back of the form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

1. Your reference PHGB030166GBP
2. Patent application number
(The Patent Office will fill in this part) 0322684.2
3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
07419294001

THE NETHERLANDS
4. Title of the invention NETWORK FOR LOCATING A WIRELESS TAG
5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

Philips Intellectual Property & Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA
08359655001
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority Application number	Date of filing
---------	-----------------------------	----------------
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day/month/year)
-------------------------------	---------------------------------
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d)) YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	18
Claims(s)	4
Abstract	1
Drawings	11 only

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents


Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)
Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date

26/9/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 815438

A G WHITE

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

NETWORK FOR LOCATING A WIRELESS TAG

5 The present invention relates to a network for locating a wireless tag.

A number of different positioning systems are known which may be employed for tracking people and/or items inside a building.

10 "Designing a positioning system for finding people and things indoors" by Jay Werb and Colin Lanzl, IEEE Spectrum, volume 35, issue 7, pages 71 to 78 (1998) provides an overview of positioning systems and describes in detail a system which comprises a number of cells, each cell comprising a cell controller connected to a plurality of antennas by co-axial cable and which can be used to locate a tag which transmits a signal. If three or more antennas
15 receive the signal, then the tag can be located.

 "Location Systems for Ubiquitous Computing" by Jeffrey Hightower and Gaetano Borriello, IEEE Computer, volume 34, issue 8, pages 57 to 66 (1998) also provides survey of location systems including the well-known Global Positioning System (GPS). One system comprises a plurality of infrared
20 detectors connected to a central server and which can be used to position a so-called "active badge" which emits an infrared signal. Another system comprises a plurality of ultrasonic sensors, mounted in a ceiling and connected to a controller, and which can be used to locate a so-called "Bat". The controller resets the sensors, sends a short-range radio signal which is
25 received by the Bat, which in turn transmits an ultrasonic signal. The sensors measure the time between reset and time of arrival of the ultrasonic signal and reports this to the controller to determine the position of the bat.

 These positioning systems, however, each suffer a drawback that they use cabling to connect detectors or antennae to a central controller.
30 Therefore, these systems are time-consuming and expensive to install.

 A possible solution is to use so-called "intelligent floor covering" wherein a chip is embedded in a floor tile. When the floor tiles are laid, each chip is

connected to neighbouring chips by electrically conductive threads of the floor tile.

However, even this system is difficult to install because tiles must be properly joined for the system to operate. It also places limitations on where
5 tiles can be placed.

The present invention seeks to provide an improved network for locating a wireless tag.

According to a first aspect of the present invention there is provided a network for locating a wireless tag, the network comprising a plurality of
10 independent wireless nodes, each node being included in a layer or respective layer unit for installation inside a building and configured to be wirelessly connectable to at least one other node such that when the layer or layer units are installed, the plurality of nodes have a determinable spaced arrangement and provide overlapping wireless coverage for locating the tag by reference to
15 the spaced arrangement.

By "independent", we mean "not connected together or to a common node by a wired network".

Thus, a network can be easily installed because each node does not need to be connected either to a neighbouring node or a central node by a
20 wired network.

The layer may comprise a floor covering, such as a carpet or carpet underlay. Layer units may include tiles for covering a floor or a ceiling. The spaced arrangement may comprise a regular pattern of nodes. Each wireless node may include means for receiving a wireless signal and means for
25 transmitting a wireless signal. Each wireless node may include means for determining a range to a neighbouring wireless node, for example such as means for determining a time of arrival of a received signal and/or means for determining a value of signal strength of a received signal.

According to a second aspect of the present invention there is provided
30 a network for locating a wireless tag, the network comprising a layer for installation inside a building and a plurality of independent wireless nodes

included in the layer, each node configured to be wirelessly connectable to at least one other node.

According to a third aspect of the present invention there is provided a network element for forming part of a network for locating a wireless tag, the
5 network element comprising a layer unit for installation inside a building and an independent wireless node included in the layer unit and configured to be wirelessly connectable to at least one other node.

The network a network element may further comprise means for generating power for a wireless node, such as a piezoelectric crystal. The
10 network a network element may further comprise means for receiving power for a wireless node from an external source, preferably in the form of an inductive means, such as a loop or coil.

According to a fourth aspect of the present invention there is provided a method of locating a wireless tag using a network comprising a plurality of
15 independent wireless nodes, each node being included in a layer or respective layer unit installed inside a building and configured to be wirelessly connectable to at least one other node, the method comprising determining a spaced arrangement of the wireless nodes and determining the location of the wireless tag with reference to the spaced arrangement.

Determining the spaced arrangement of the wireless nodes may
20 comprise transmitting a first message from a first node, the first message identifying the first node, noting a time of arrival of the first message at a second node and transmitting a second message from the second node, the second message identifying the first and second nodes, the time of arrival of
25 the first message and a time of transmission of the second message. The method may further comprise transmitting a message from the second node identifying the location of the second node within the spaced arrangement.

According to a fifth aspect of the present invention there is provided a method of operating a wireless node included in a layer or respective layer unit
30 installed inside a building and configured to be wirelessly connectable to at least one other node, the method comprising co-operating with the at least one other node so as to determine location of the wireless node within a spaced

arrangement of wireless nodes and co-operating with a wireless tag so as to determine location of the wireless tag with reference to the spaced arrangement of wireless nodes.

According to a sixth aspect of the present invention there is provided a
5 computer program comprising instructions which, when executed by data processing apparatus, causes the data processing apparatus to perform the method.

Embodiments of the present invention will now be described, by way of
10 example with reference to the accompanying drawings in which:

Figure 1 is a plan of a floor of a building in which an embodiment of a network according to the present invention is used;

Figure 2 is a magnified view of a portion of the plan shown in Figure 1;

Figure 3 is a cross-section of the portion of the plan shown in Figure 2
15 taken along the line A-A;

Figure 4 is a schematic diagram of a wireless node;

Figure 5 is a process flow diagram of a method of determining an arrangement of spaced, wireless nodes;

Figure 6 shows content of a first message;

Figure 7 illustrates transmission of the first message shown in Figure 6
20 to neighbouring nodes;

Figure 8 shows content of a second message;

Figure 9 illustrates forward transmission of a second set of messages to neighbouring nodes;

Figure 10 is a process diagram of transmission of a request by a wireless tag and reception of replies from wireless nodes;

Figure 11 is a magnified view of a portion of the plan shown in Figure 1 in which a wireless tag associated with a printer is located relative to a number of wireless nodes;

Figure 12 is a cross-section of the portion of the plan shown in Figure
30 11 taken along the line B-B;

Figure 13 is a process flow diagram of a method of locating a tag performed by an initiating wireless node;

Figure 14 illustrates a request transmitted by an initiating wireless node;

Figure 15 is a process flow diagram of a method of locating a tag performed by a wireless node;

Figure 16 is a magnified view of a portion of the plan shown in Figure 1 in which a wireless tag associated with a key ring is located relative to a number of wireless nodes;

Figure 17 illustrates a reply transmitted by a wireless tag;

Figure 18 illustrates a reply transmitted by a wireless node;

Figure 19 is a process diagram of transmission of a request by a wireless node and reception of replies from neighbouring wireless nodes;

Figure 20 is a process diagram of transmission of a list by a wireless node;

Figure 21 is a cross sectional view of a tile including a wireless node and a piezoelectric crystal for generating power for the wireless node; and

Figure 22 is a cross sectional view of a tile including a wireless node and a loop for receiving power.

Network 5

Referring to Figure 1, a plan of a floor 1 of a building 2 in which an embodiment of the present invention is used is shown. In this example, the building is an office. However, the building 2 may be any type of domestic, commercial, industrial or public building such as a house, a block of flats, warehouse, factory, train or bus station, airport, theatre or cinema, hospital or government office.

A plurality of layer units, which in this example take the form of floor tiles 3, are laid on the floor 1 in the building 2. Each floor tile 3 includes a wireless node 4. The wireless node 4 may be placed in or under the tile 3. Preferably, the floor tiles 3 are square and are laid in a regular pattern. However, other shapes of floor tiles 3 may be used and all the tiles need not be the same shape. Furthermore, the floor tiles 3 need not be laid regularly. Moreover,

conventional floor tiles (not shown), i.e. floor tiles without wireless nodes, may be included either regularly or irregularly. Thus, floor tiles 3 may be sparsely used. Additionally or alternatively, a layer may be used, for example in the form of a carpet (not shown) or a carpet underlay (not shown) including
 5 wireless nodes distributed across the layer, i.e. in the x-y plane. The layer units may take the form of ceiling tiles.

In accordance with the present invention, the wireless nodes 4 provide a network 5 for locating a wireless tag 6₁, 6₂. In a first example, a first wireless tag 6₁ is attached to or embedded in a printer 7. As will be explained in more
 10 detail later, the locating network 5 can be used to enable the printer 7 to ascertain its position. The printer 7 can transmit this information via a local area network 8 to a computer 9 to allow a user 10, such as an officer charged with tracking company assets or an IT manager, to track the location of the printer 7. In a second example, a second wireless tag 6₂ is incorporated into a
 15 key ring 11. As will be explained in more detail later, the locating network 5 can be used to locate the key ring 11 and thus help the user 10 to find their keys using, for example computer 9 or a personal digital assistant 12.

Referring to Figures 2 and 3, a wireless node 4₅ transmits a signal 13 whose signal strength, S, depends on radial distance, r, from the wireless node
 20 4_r. For example, in the case of a radio signal, the signal strength may be inversely proportional to the square of the distance r, namely:

$$S = \frac{S_0}{1 + (kr)^2} \quad (1)$$

where k is constant.

Thus, for a given detection threshold S_T, a range R of transmission for
 25 the wireless node 4₅ may be defined such that $R = 1/k \sqrt{(S_0/S_T)}$ when $(kR)^2 \ll 1$. Values of S₀ and S_T are chosen such that the wireless node 4₁ can directly transmit and receive signals to and from at least one neighbouring wireless node 4₁, 4₂, 4₃, 4₄, 4₆, 4₇, 4₈, 4₉. Preferably, values of S₀ and S_T are chosen such that the wireless node 4₅ can only directly transmit and receive
 30 signals to and from only the nth-nearest wireless nodes. For example, as

shown in Figure 3, the wireless node 4_s can only directly transmit and receive signals to and from the nearest and next nearest wireless nodes (i.e. $n=2$). Thus, a radiating pattern is hemispherical. Nevertheless, antenna producing different radiating patterns may be used.

- 5 The wireless nodes 4 are independent. By "independent" we mean that the nodes 4 are not connected together or to a central node by a wired network. Thus, tiles 3 may be easily installed, moved or removed.

Wireless node 4

- 10 Referring to Figure 4, a wireless node 4 comprises means 14 for receiving and transmitting wireless signals, means 15 for processing signals, means 16 for storing data, means 17 for keeping time and means 18 for storing power.

- 15 The wireless receiving and transmitting means 14 is preferably in the form of a short-range radio transceiver circuit with integrated antenna. However, a separate antenna (not shown) may be provided. One or more fibres of the tile 3 may form the antenna. The processing means 15 is preferably in the form of a microcontroller. The storing means 16 is preferably in the form of non-volatile memory and stores a computer program 19 for
20 controlling operation of the wireless node 4 and a table 20 comprising a list of node identifies and corresponding position data. The power storing means 18 is preferably in the form of battery.

- 25 Preferably, the wireless node 4 is compliant with Zigbee™ standards. However, the wireless node 4 may be compliant with other standards such as Bluetooth™ or IEEE 802.11x.

- 30 According to Zigbee™ standards, 255 devices can be wirelessly connected to form a network, although a greater number of devices can be wirelessly connected using multiple Zigbee™ networks. A device can operate in 2.4 GHz, 915 MHz and/or 868 MHz radio frequency bands, support raw data transfer rates of 250 kilobits per second (kbps), 40 kbps and 20 kbps respectively and have a transmission range of typically 10 metres and up to 75 metres. Preferably, each device has a transmission range of between 2 and 5

meters. An overview of the Zigbee™ standards may be obtained via the World Wide Web at www.zigbee.org or from the Zigbee™ Alliance, Bishop Ranch, 22694 Bishop Drive, Suite 275, San Ramon, CA 94583, USA.

5 *Locating wireless nodes 4*

Referring again to Figure 1, the wireless nodes 4 form a spaced arrangement known as a "mesh" or "grid". Each node 4 can locate itself or be located relative to neighbouring nodes 4 by exchanging signals, determining a distance between the node 4 and each neighbouring node 4 and using
10 trilateration methods similar to those used in GPS. Thus, the spaced arrangement of nodes 4 can be determined.

A preferred method of determining distance comprises determining time of flight of a signal between nodes 4. However, additionally or alternatively other methods may be used, such as determining a received signal strength
15 indication (RSSI).

A process by which location information flows through the network 5 and by which the spaced arrangement of nodes 4 can be determined will now be described:

Referring to Figures 5, 6 and 7, a first wireless node 4₁ acts as a
20 network coordinator. The first wireless node 4₁ prepares a message 21₁ comprising a first entry 22₁. Each entry comprises a field 23 for identifying the node, a field 24 giving a time of arrival (TOA) of a previously received signal and a field 25 giving a time of departure (TOD) of a currently transmitted signal. TOD may also be referred to as time of transmission. In this case, a
25 first identifying field 23₁ comprises value "A", a first TOA field 24₁ is left blank or filled with a dummy value and a first TOD field 25₁ comprises a value t₁. The value in the first TOD field 25₁ is measured using clock 17 (Figure 4) and may be adjusted by adding a fixed delay to take account of the time needed to prepare and send the message 22₁. The message 21₁ is transmitted to
30 neighbouring nodes 4₂, 4₄, 4₅ within a range R.

Taking the second node 4₂ as an example of how a node 4 operates, the second node 4₂ listens for messages 21 (step S1), receives a message 21

(step S2), in this case message 21₁, notes its time of arrival (step S3) and stores the message 21₁ in table 19 (Figure 4) (step S4). Optionally, if it has enough range measurements, the node 4₂ may compute its position using trilateration.

5 Referring to still to Figure 5 and also to Figures 8 and 9, the second node 4₂ prepares a second message 21₂ by adding a second entry 22₂ after the first entry 22₁, the second entry 22₁ including a second identifying field 23₂ comprising value "B", a second TOA field 24₂ comprising value t₂' and a second TOD field 25₂ comprising value t₃' (step S6). The value in the first
10 TOD field 25₁ is measured using clock 17 (Figure 4). The message 21₂ is transmitted to neighbouring nodes 4₁, 4₃, 4₄, 4₅, 4₆ (step S7). Messages 21 transmitted by the fourth node 4₄ at substantially the same time and by the fifth node 4₅ a short time later are shown as dotted lines.

Each node 4 performs and repeats this process whenever it receives a
15 message 21. Each time a node 4 receives a message 21, it stores it in memory 16 thereby increasing the number of range measurements.

If two nodes 4 exchange messages 21, then clock drift for one of the clocks 17 (Figure 4) may be corrected. Taking the example of the first and second nodes 4₁, 4₂, once the first node 4₁ receives the second message 21₂,
20 it has enough information to correct for clock drift. The information comprises the time of departure of the first message 21₁ from the first node 4₁, i.e. t₁, the time of arrival of the first message 21₁ at the second node 4₂, i.e. t₂', the time of departure of the second message 21₂ from the second node 4₂, i.e. t₃', and the time of arrival of the second message 21₂ at the first node 4₁, i.e. t₄. If the
25 clock 17 of the second node 4₂ is adrift by a fixed amount, x, relative to the clock 17 of the first node 4₁, i.e. t' = t + x, then the first node 4₁ can compensate for the drift.

The time of flight Δt_{AB} between the first and second nodes 4₁, 4₂ is:

$$\begin{aligned}
\Delta t_{AB} &= \frac{(t_1 - t_4) - (t_2' - t_3')}{2} \\
&= \frac{(t_1 - t_4) - ((t_2 + x) - (t_3 + x))}{2} \\
&= \frac{(t_1 - t_4) - (t_2 - t_3)}{2}
\end{aligned} \tag{2}$$

Note that the term x does not appear in the final line.

The drift can be explicitly calculated using:

$$x = t_2' - \Delta t_{AB} \tag{3}$$

5 Usually the clock 17 of the first node 4₁ is the clock to which the whole network 5 is synchronised. Any node may ascertain, and optionally correct, its own clock drift by exchanging a series of linked messages (via other nodes 4) with the first node 4₁ or a node 4 known to have a clock 17 (Figure 4) which has been corrected for drift. It will be appreciated that this can happen once
10 enough messages 21 have passed back and forth though the network 5. Alternatively, a node 4 may request the first node 4₁ to inform it of its clock drift.

The first node 4₁ gathers a plurality of messages 21 which have propagated through the network 5. For example, the first node 4₁ transmits
15 the first message 21₁ to the second node 4₂, the second node 4₂ transmits the second message to the third node 4₃, the third node 4₃ transmits a fourth message to a neighbouring node 4 and so on. Each time a message 21 is transmitted, not only does it propagate further into the network 5 away from the first node 4₁, but also returns back, towards the first node 4₁. Moreover,
20 messages 21 can propagate by a circuitous route. In this way, the first node 4₁ may eventually receive a plurality of messages 21, each of which have passed through a node 4 and returned to the first node 4₁ via different routes. Using trilateration, the first node 4₁ can calculate the positions of all the nodes 4 of the network. Preferably, range times are converted into range distances
25 using speed $c = 3 \times 10^8 \text{ ms}^{-1}$ and positions are expressed in Cartesian coordinates (x, y) . An absolute position at least one network nodes 4 may be

supplied thereto or an indication of whether one node is considered to be an origin.

In fact, each node 4 may gather messages 4 in the same way and, using trilateration, can calculate the positions of all the nodes 4 of the network.

5 The first message 21₁ may trigger an avalanche of further messages 21. Therefore, each node 4 may limit transmission of messages. For example, each node may limit the number of entries 22₁, 22₂ in a message 21 by adding a new entry and deleting the oldest entry. Additionally or alternatively, each node, if it has just transmitted a message 22, may ignore
10 the next message 22 received from a neighbouring node 4. Nodes may selectively limit transmission of messages at different times. For example, each node 4 may transmit a given number of messages initially and thereafter limit transmission of messages.

Thus, by exchanging messages 21, a first node 4₁ or each node 4, may
15 determine location of nodes 4 within the network 5 and, thus, the spaced arrangement of nodes 4.

The spaced arrangement of nodes 4 can be used to locate a tag 6₁, 6₂ by transmitting and/or receiving signals to and/or from the tag 6₁, 6₂.

20 *Locating printer 7*

As mentioned earlier, a first wireless tag 6₁ is attached to or embedded in a printer 7. The wireless tag 6₁ comprises a wireless node 4 and a data interface (not shown) to the printer 7.

Referring to Figures 10, 11 and 12, the wireless tag 6₁ is within range of
25 a number of nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈. The wireless tag 6₁ periodically "wakes up" and broadcasts a request 26 for position information (step S8).

The nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ transmit respective
30 replies 27₁, 27₂, 27₃, 27₄, 27₅, 27₆, 27₇, 27₈, 27₉ which are received by the wireless tag 6₁, for example as illustrated in Figures 11 and 12 (step S9). Each reply 27₁, 27₂, 27₃, 27₄, 27₅, 27₆, 27₇, 27₈, 27₉ includes an identity, a position and a time of departure of the wireless node 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅,

4₁₆, 4₁₇, 4₁₈ transmitting the reply. The wireless tag 6₁ receives the replies 27₁, 27₂, 27₃, 27₄, 27₅, 27₆, 27₇, 27₈, 27₉ and notes their time of arrival (step S10). Figure 10 is illustrative and does not necessarily show the order in which replies 27₁, 27₂, 27₃, 27₄, 27₅, 27₆, 27₇, 27₈, 27₉ are received by the wireless tag 6₁. However, Figures 11 and 12 show that the distance between the tag 6₁ and respective nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ differ and thus will be reflected in the time of flight, Δt .

Assuming that the clocks 17 (Figure 4) of all the nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ are synchronised, i.e. have been compensated for drift and tell "network time", then the wireless tag 6₁ can determine its position using trilateration (step S11).

However, if the clocks 17 (Figure 4) of the nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ are not synchronised, the wireless tag 6₁ may transmit a second request (not shown), including a time of departure, and receive a second set of replies (not shown) and correct for drift of each clock 17 (Figure 4) of each node 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ using the process described earlier.

The wireless tag 6₁ supplies the position to the printer 7 (step S12), which may be stored in memory (not shown). The printer 7 transmits the position via the local area network 8 to the computer 9 either on request or unprompted, for example periodically or whenever a change in position is detected. Thus, the position of the printer 7 may be tracked by user 10.

Alternatively, the wireless tag 6₁ may behave as if it were a wireless node 4 in the network 5 and locate itself in the manner described earlier when the network 5 is established. The wireless tag 6₁ can perform position updating whenever there is a change in position resulting from the printer 7 being moved.

It will be appreciated that the wireless tag 6₁ may determine its position by receiving messages from or using only three or more of the neighbouring nodes 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈.

As mentioned earlier, a second wireless tag 6₂ (Figure 1) is attached to a key ring 11.

Referring to Figure 1, if the user 10 wishes to find their keys, they can instruct the network 5 to locate the wireless tag 6₂ via a computer 9 or PDA 12 having its own wireless tag 6₃. The wireless tag 6₃ comprises a wireless node 4 and a data interface (not shown) to the computer 9 or PDA 12. It will be appreciated that the wireless tag 6₃ is not necessarily operating as a tag for the purposes of determining the position of the computer 9 or PDA 12, but as a convenient way of communicating with network 5.

Referring to Figure 13 and 14, the wireless tag 6₃ transmits an enquiry message 28 (step S13), specifying the identity of the wireless tag 6₂ attached to key ring 11 for example with ID = Z, and begins to listen for a reply 29 (Figure 18) (step S14). The wireless tag 6₃ checks whether it has received a reply 29 (Figure 16) (step S15) and whether it has "timed out" (step S16), i.e. whether a predetermined time has elapsed. If it receives a reply 29 (Figure 18), then it computes a position and transmits this information to the computer 9 or PDA 12 (step S17).

Referring to Figure 15, each wireless node 4 listens out for enquiry messages 28 (Figure 14) (step S18). If it receives such the enquiry message 28 (step S19), a wireless node 4 re-transmits the enquiry message 28 (step S20) and begins to listen for a reply 29 (Figure 18) (step S21). The wireless node 22 checks whether it has received a reply 29 (Figure 18) (step S22) and whether it has "timed out" (step S23), i.e. whether a predetermined time has elapsed.

The wireless tag 6₂ periodically "wakes up" and listens for enquiry messages 28 (Figure 14). It receives the enquiry message 28 and notes that the enquiry message 28 relates to it by examining the ID.

Referring to Figure 16 and 17, the wireless tag 6₂ transmits a reply 29₁ comprising a first entry 30₁. Each entry comprises a field 31 for identifying the node, a field 32 giving a time of arrival (TOA) of a previously received signal and a field 33 giving a time of departure (TOD) of a currently transmitted signal. In this case, a first identifying field 31₁ comprises value "Z", a first TOA

field 32₁ is left blank or filled with a dummy value and a first TOD field 33₁ comprises a value t₂.

The wireless tag 6₂ may receive copies of the enquiry message 28 at different times, from different nodes and/or via different routes. To prevent proliferation of replies, the wireless tag 6₂ may ignore a second and subsequent copy of the enquiry message 28.

The reply 29₁ is transmitted to neighbouring nodes 4₁₉, 4₂₀, 4₂₁, 4₂₂, 4₂₃, 4₂₄, 4₂₅, 4₂₆, 4₂₇.

Referring again to Figure 15 and also to Figure 18, if a wireless node 4 receives the reply 29₁ it prepares a new reply 29 by adding another entry 30_P including its identity 31_P, a TOA 32₂ and a TOD 33₂ (step S24) and transmits the new reply 29 to neighbouring nodes 4 (step S25) until it reaches the wireless tag 6₃ (Figure 1).

The wireless tag 6₃ (Figure 1) receives a plurality of replies via different neighbouring nodes 4₁₉, 4₂₀, 4₂₁, 4₂₂, 4₂₃, 4₂₄, 4₂₅, 4₂₆, 4₂₇ and can determine the position of the wireless tag 6₂ using trilateration.

It will be appreciated that the wireless tag 6₃ may determine the position of the wireless tag 6₂ using replies received via only three or more of the neighbouring nodes 4₁₉, 4₂₀, 4₂₁, 4₂₂, 4₂₃, 4₂₄, 4₂₅, 4₂₆, 4₂₇.

20

The embodiment of the present invention has advantages. Tiles can be moved for maintenance and, once replaced, do not need recalibrating. Tiles can be used on staircases and ramps. A carpet or tiles can be laid in the home. If further tiles are added, they can be easily detected and incorporated into the network. Fingerprinting, whereby signal strength is measured and logged throughout the building, is not required. Carpet fitters not having any technical knowledge or specialist training in positioning networks can lay the carpet or tiles.

30 *Locating wireless nodes 4 in a regular configuration*

The process described earlier by which location information flows through the network 5 and by which the spaced arrangement of nodes 4 can

be determined may involve transfer of large amounts of data. However, if assumptions are made about the spaced arrangement of nodes 4, then a simpler process may be employed. In particular, if the tiles 3 are square or hexagonal, laid in a regular pattern and the wireless nodes 4 are notified of these facts, then the wireless nodes 4 can gather information about their surroundings more quickly.

Referring to Figures 2 and 19, wireless nodes 4 can operate in two modes, namely initiator or slave mode.

In initiator mode, a wireless node 4, for example the fifth wireless node 4₅, transmits a message 34 for reception by any nodes 4 within range (step S26). The message 34 is similar to the message 21₁ shown in Figure 6 except that the value of TOD may be omitted. Nevertheless, the wireless node 4₅ makes a note of the TOD. The wireless node 4₅ then waits for replies 35₁, 35₂, 35₉. A wireless node 4₅ can initiate transmission of a message periodically, randomly or on request.

In slave mode, a wireless node 4, for example wireless nodes 4₁, 4₂, 4₃, 4₄, 4₆, 4₇, 4₈, 4₉, each wait for messages 34 from one or more master nodes 4₅, notes a TOA (step S27) and transmits a reply 35₁, 35₂, 35₉ (step S28). The reply 35₁, 35₂, 35₉ is similar to that shown in Figure 8 except that the value of TOD from the initiator is omitted. In other words, the reply 35₁, 35₂, 35₉ includes the identity of the wireless node 4₅, the identity of the wireless node 4₁ sending the reply and TOD from the wireless node 4₁ are also specified.

The wireless node 4₅ receives replies 35₁, 35₂, 35₉, notes their TOAs (step S29), corrects for clock drift and stores a list of nodes it can "hear" (step S30), together with a range value, preferably as a distance in memory 16 (Figure 4).

Each wireless node 4 takes turns to operate in initiator mode. Thus, steps 26, 29 and 30 may be performed by wireless node 4₁, 4₂, 4₃, 4₄, 4₆, 4₇, 4₈, 4₉. Conversely, each wireless node 4 can operate in slave mode. It will be appreciated that wireless nodes 4 can also "go to sleep" and "wake up" periodically, randomly or according to a prearrange timetable and enter into initiator or slave mode.

Referring to Figures 2 and 20, a wireless node 4 can also operate in two other modes, namely report sender and report receiving modes.

In report sender mode, a wireless node 4, for example wireless node 4₅, transmits periodically, randomly or on request a list 36 of the neighbouring nodes it, or another node, can "hear" and respective ranges and, if known, its or the other node's known position (step S31). In report receiver mode, a wireless node 4 receives and stores a list of the neighbouring nodes another node can "hear" (step S32), together with respective ranges, if given, and known positions, if known. Using these lists and further information on layout, each wireless node can determine its own and other nodes' locations.

Referring to again Figure 2, the fifth wireless node 4₅ can hear first, second, third, fourth, sixth, seventh, eighth and ninth wireless nodes 4₁, 4₂, 4₃, 4₄, 4₆, 4₇, 4₈, 4₉. If the fifth wireless node 4₅ knows that the first wireless node 4₁ cannot hear the third node 4₃ and that the third node 4₃ cannot hear the first wireless node 4₁, then it can deduce that the first and third wireless nodes 4₁, 4₃ are not next to each other. If the fifth wireless node 4₅ knows that the second wireless node 4₂ can hear the first and third nodes 4₁, 4₃ then it can deduce that second node 4₂ is between the first and third wireless nodes 4₁, 4₃. If fifth wireless node 4₅ also knows that the pattern is based on a square, then it can assume that the first and third wireless nodes are at corners of a square and assign possible x, y coordinates. By continuing through the list, the fifth wireless node 4₅ can determine where its neighbours are located.

If wireless nodes 4 having known positions are "seeded", neighbouring nodes 4 can located themselves relative to one or more wireless nodes 4 of known position and thereby know their own location. This process can then propagate throughout the network. Thus, if first, second and fourth wireless nodes 4₁, 4₂, 4₄ are known to be at locations (570, 30), (570, 90) and (510, 30) (expressed in centimetres) respectively, then the fifth wireless node 4₅ may determine its location to be (510, 90), by virtue of receiving signals from these wireless nodes 4₁, 4₂, 4₄ and knowing that a square pattern is being used. Using wireless nodes 4 having known positions also has the advantage that

range measurements can be calibrated to take account of delays caused by internal processing which can otherwise increase the apparent range.

Other ways of expressing position, such defining a tile position in an array in the form (1, 1), (1, 2) for first and second nodes 4₁, 4₂ respectively, may be used.

Locating printer 7 using a regular configuration of wireless nodes 4

Wireless nodes 4 throughout the network 5 can find their position either using the first process or the second, simpler process hereinbefore described.

In either case, if a wireless node 4 knows its position, it can transmit a list including its known position (step S31). Thus, using the process illustrated in Figure 10, if each nearby node 4₁₀, 4₁₁, 4₁₂, 4₁₃, 4₁₄, 4₁₅, 4₁₆, 4₁₇, 4₁₈ transmits a message including its known position, then wireless tag 6₁ can determine its location.

Alternative power source

Referring to Figure 21, a tile 3' may be provided with means 37 for generating power, preferably in the form of a piezoelectric crystal. When a person steps onto the tile 3', the piezoelectric crystal 37 is deformed and a voltage develops across it. The voltage may be used to re-charge battery 17.

Referring to Figure 22, a tile 3'' may be provided with means 38 for receiving power, preferably in the form of a loop or coil. A loop or coil (not shown) is provided, for example in a skirting board or additional layer, such as an underlay, and a current is passed through the loop or coil. A current is induced in the loop or coil 38 of the tile 3''. This may be used to re-charge battery 17.

From reading the present disclosure, other variations and modifications will be apparent to persons skilled in the art. Such variations and modifications may involve equivalent and other features which are already known in the design, manufacture and use of systems for locating mobile units and

component parts thereof and which may be used instead of or in addition to features already described herein.

Although Claims have been formulated in this Application to particular combinations of features, it should be understood that the scope of the disclosure of the present invention also includes any novel features or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any Claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The Applicants hereby give notice that new Claims may be formulated to such features and/or combinations of such features during the prosecution of the present Application or of any further Application derived therefrom.

CLAIMS

1. A network (5) for locating a wireless tag (6₁, 6₂), said network comprising a plurality of independent wireless nodes (4), each node being
5 included in a layer or respective layer unit (3) for installation inside a building (2) and configured to be wirelessly connectable to at least one other node such that when said layer or layer units are installed, said plurality of nodes have a determinable spaced arrangement and provide overlapping wireless coverage for locating said tag by reference to said spaced arrangement.
10
2. A network according to claim 1, wherein said layer comprises a floor covering.
3. A network according to claim 1 or 2, wherein said layer
15 comprises a carpet underlay.
4. A network according to claim 1, wherein layer units (3) include tiles for covering a floor.
- 20 5. A network according to claim 1 or 4, wherein said layer units include tiles for covering a ceiling.
6. A network according to any preceding claim, wherein said spaced arrangement comprises a regular pattern of nodes.
25
7. A network according to any preceding claim, wherein each wireless node includes means for receiving (14) a wireless signal and means (14) for transmitting a wireless signal.
- 30 8. A network according to any preceding claim, wherein each wireless node includes means (15) for determining a range to a neighbouring wireless node.

9. A network according to claim 8, wherein said means for determining a range comprises means (17) for determining a time of arrival of a received signal.

5

10. A network according to claim 8 or 9, wherein said means for determining a range comprises means for determining a value of signal strength of a received signal.

10 11. A network for locating a wireless tag substantially as hereinbefore described with reference to Figures 1 to 12 of the accompanying drawings.

12. A network (5) for locating a wireless tag (6₁, 6₂), said network
15 comprising:

a layer for installation inside a building; and

a plurality of independent wireless nodes (4) included in said layer, each node configured to be wirelessly connectable to at least one other node.

20 13. A network element for forming part of a network (5) for locating a wireless tag, said network element comprising:

a layer unit (3) for installation inside a building; and

an independent wireless node (4) included in said layer unit and configured to be wirelessly connectable to at least one other node.

25

14. A network according to claim 12 or a network element according to claim 13, further comprising means (37) for generating power for a wireless node.

30 15. A network or a network element according to claim 14, wherein said means (37) for generating power comprises a piezoelectric crystal.

16. A network according to claim 12 or a network element according to claim 13, further comprising means (38) for receiving power for a wireless node from an external source.

5 17. A network or a network element according to claim 16, wherein said means (38) for receiving power comprises inductive means.

18. A method of locating a wireless tag (6₁, 6₂) using a network (5) comprising a plurality of independent wireless nodes (4), each node being
10 included in a layer or respective layer unit (3) installed inside a building and configured to be wirelessly connectable to at least one other node, the method comprising:

determining a spaced arrangement of said wireless nodes; and
determining the location of said wireless tag with reference to said
15 spaced arrangement.

19. A method according to claim 18, wherein determining said spaced arrangement of said wireless nodes comprises:

transmitting a first message (34) from a first node (4₅), said first
20 message identifying said first node;
noting a time of arrival of said first message at a second node (4₁); and
transmitting a second message (35₁) from said second node, said
second message identifying said first and second nodes, the time of arrival of
said first message and a time of transmission of said second message.

25

20. A method according to claim 19, further comprising:

transmitting a message (36) from said first node identifying the location
of said first node within said spaced arrangement.

30

21. A method of operating a wireless node (4) included in a layer or respective layer unit (3) installed inside a building (2) and configured to be wirelessly connectable to at least one other node, the method comprising:

co-operating with said at least one other node so as to determine location of said wireless node within a spaced arrangement of wireless nodes and

co-operating with a wireless tag (6₁, 6₂) so as to determine location of
5 said wireless tag with reference to said spaced arrangement of wireless nodes.

22. A computer program (20) comprising instructions which, when executed by data processing apparatus (4), causes said data processing apparatus to perform the method according to claim 21.

10

23. A network for locating a wireless tag substantially as hereinbefore described with reference to Figures 1 to 9 and 13 to 17 of the accompanying drawings.

15 24. A network for locating a wireless tag substantially as hereinbefore described with reference to Figures 1, 19 and 20 of the accompanying drawings.

ABSTRACT

NETWORK FOR LOCATING A WIRELESS TAG

5 A network for locating a wireless tag comprises a plurality of wireless nodes. The nodes are not connected together by a wired network. Each node is included in a floor tile for installation inside a building and configured to be wirelessly connectable to at least one other node. When the floor tiles are installed, the plurality of nodes form a mesh or grid and provide overlapping
10 wireless coverage for locating the tag by reference to mesh.

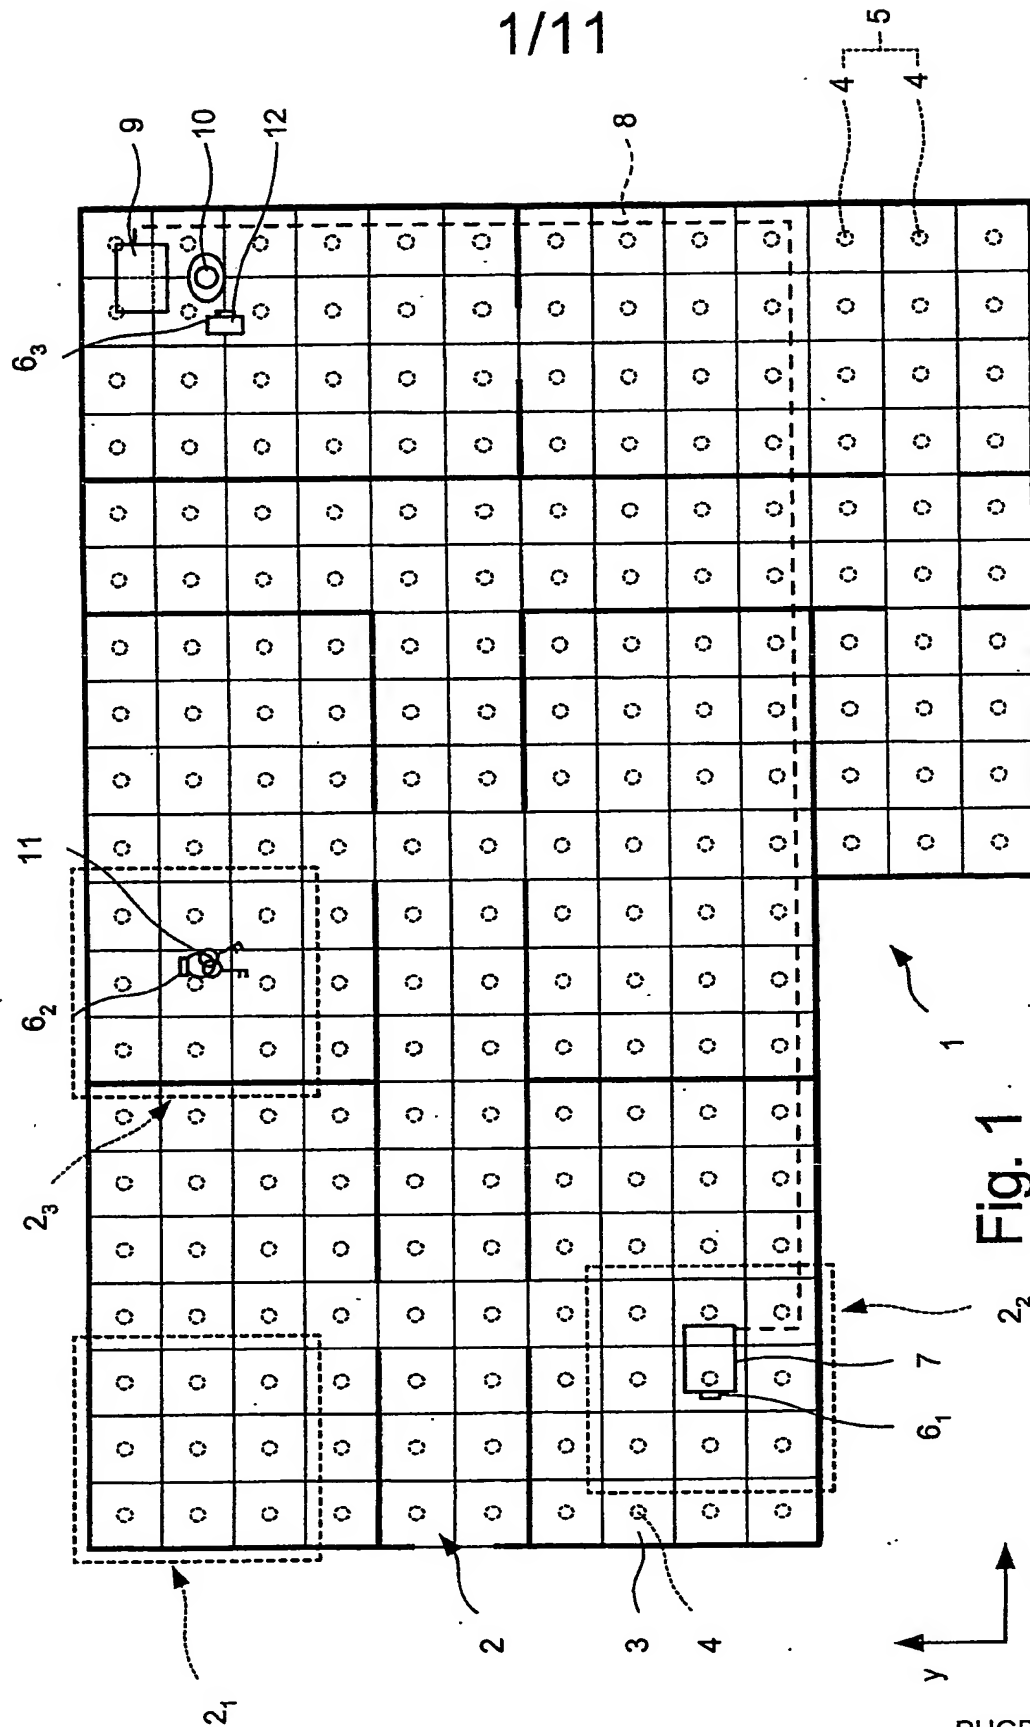


Fig. 1

2/11

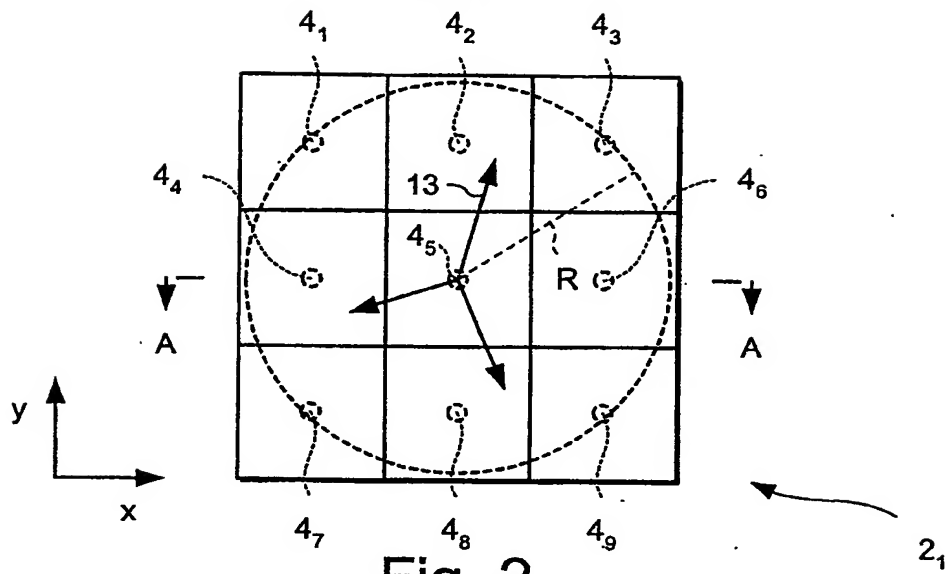


Fig. 2

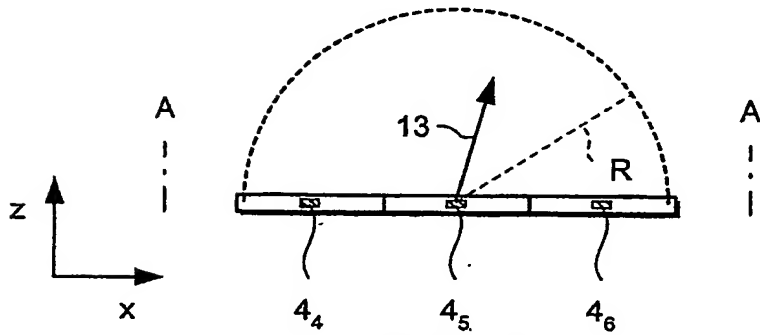


Fig. 3

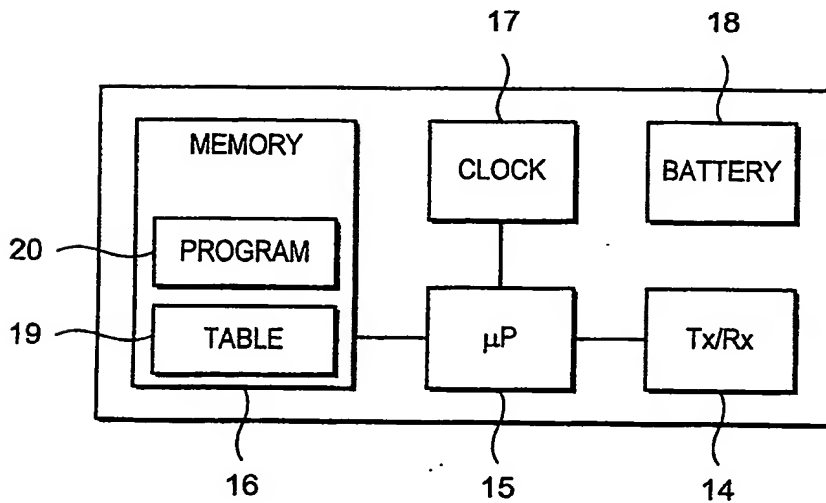


Fig. 4

3/11

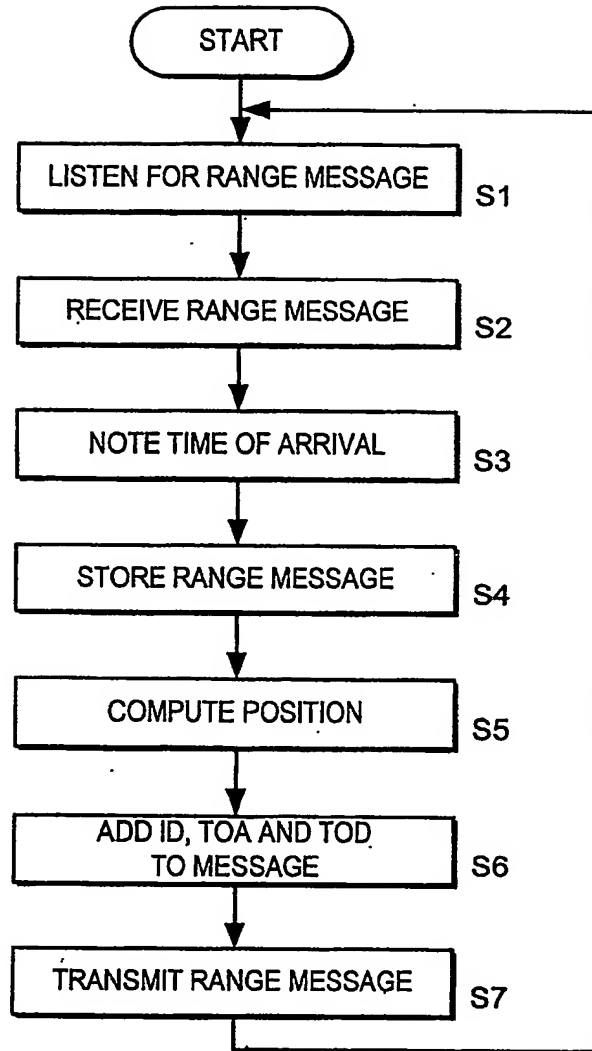


Fig. 5

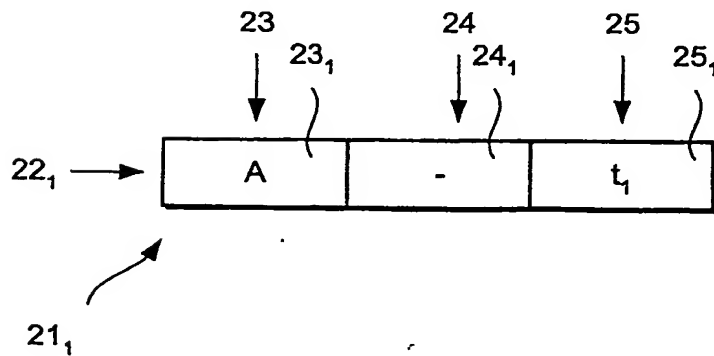


Fig. 6

4/11

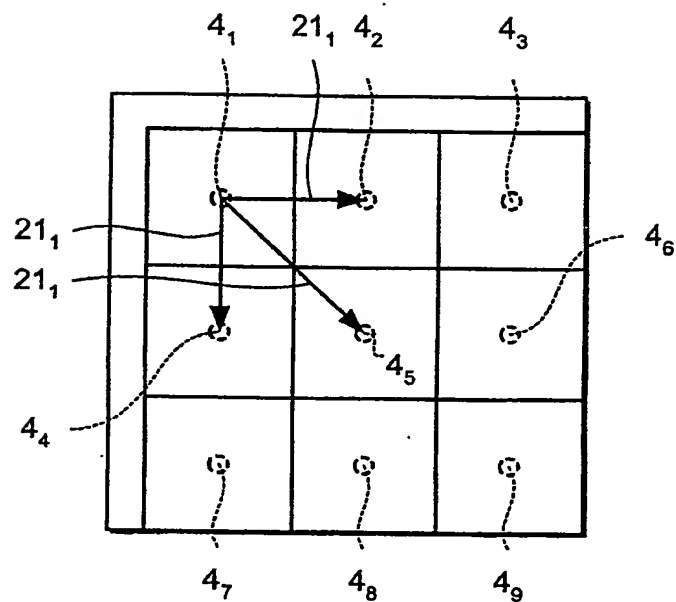


Fig. 7

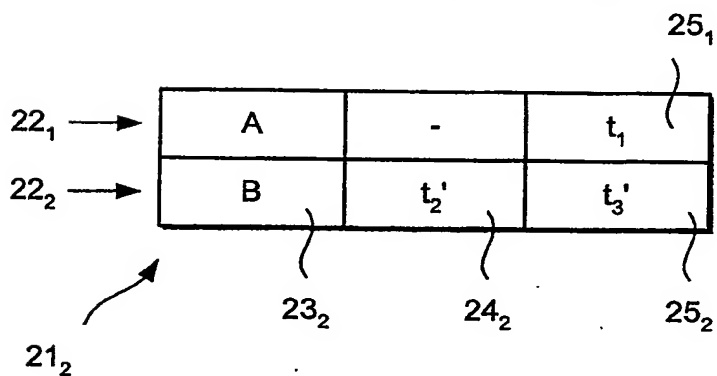


Fig. 8

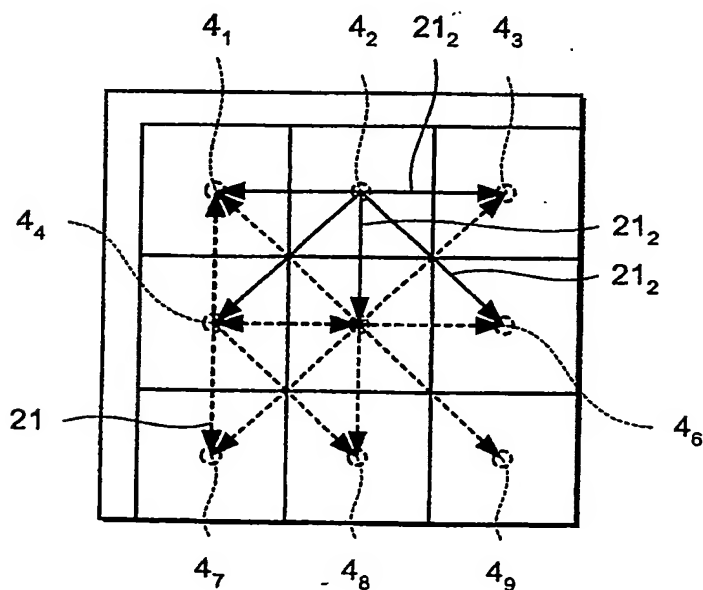


Fig. 9

5/11

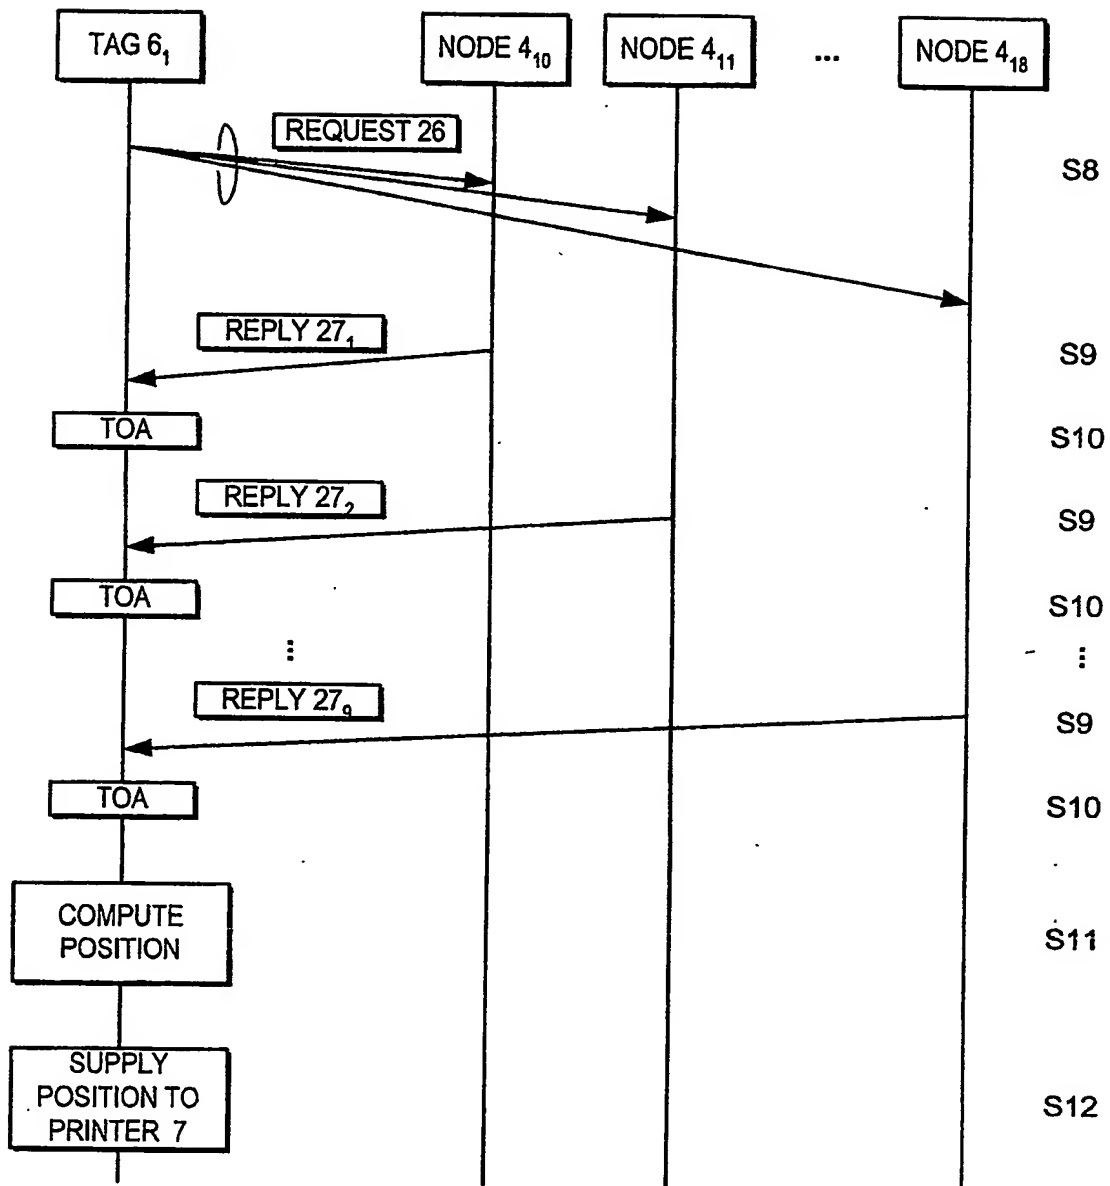


Fig. 10

 2_2 B
i
i

7/11

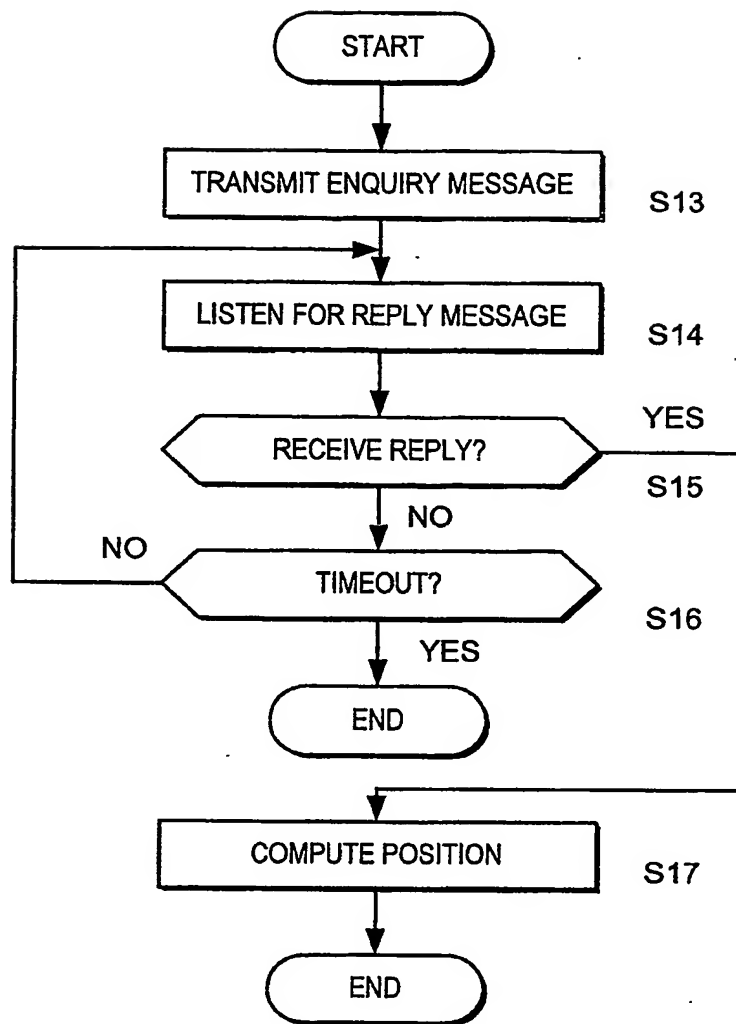


Fig. 13



Fig. 14

8/11

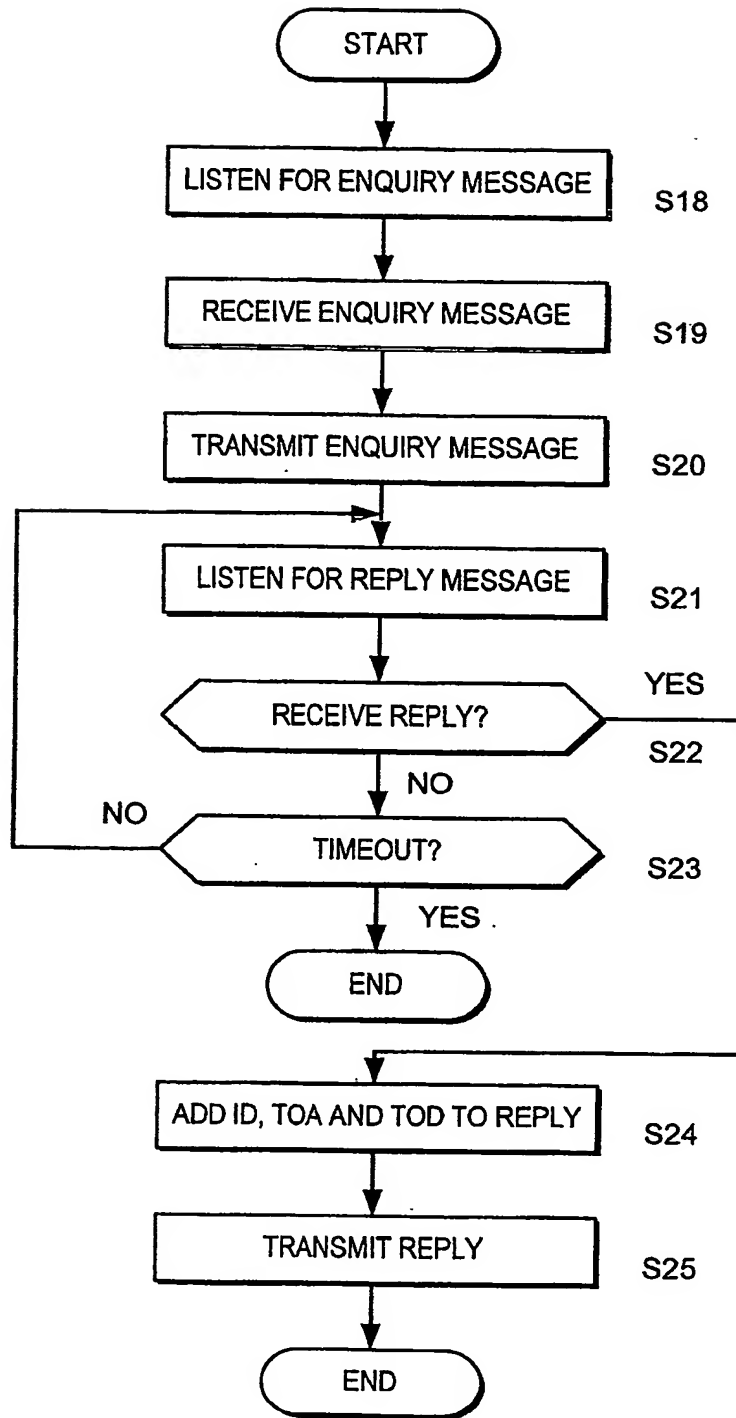


Fig. 15

9/11

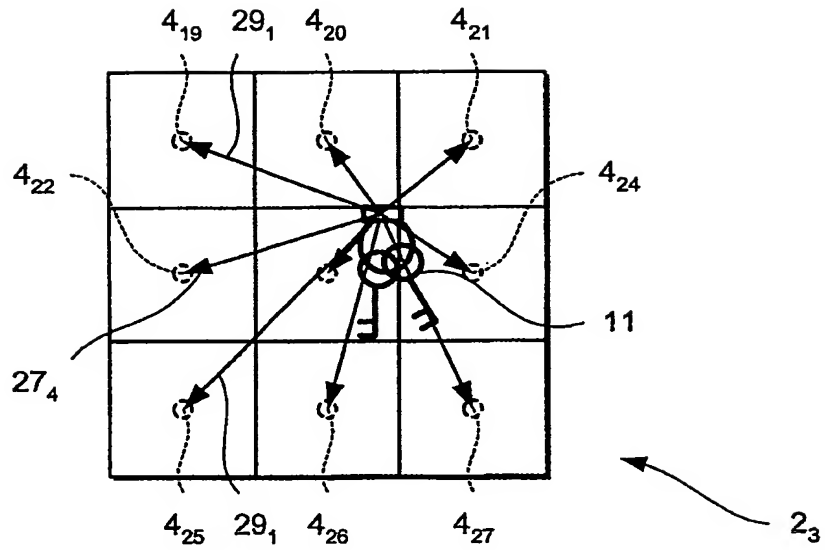


Fig. 16

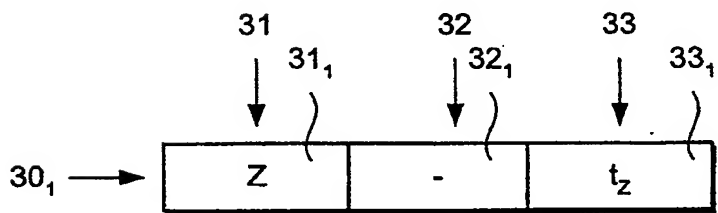


Fig. 17

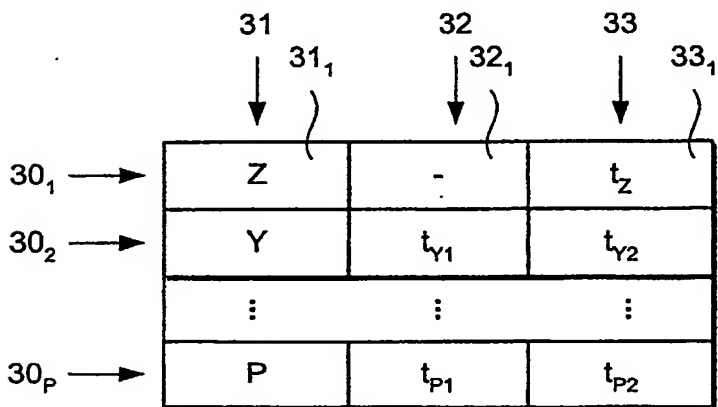


Fig. 18

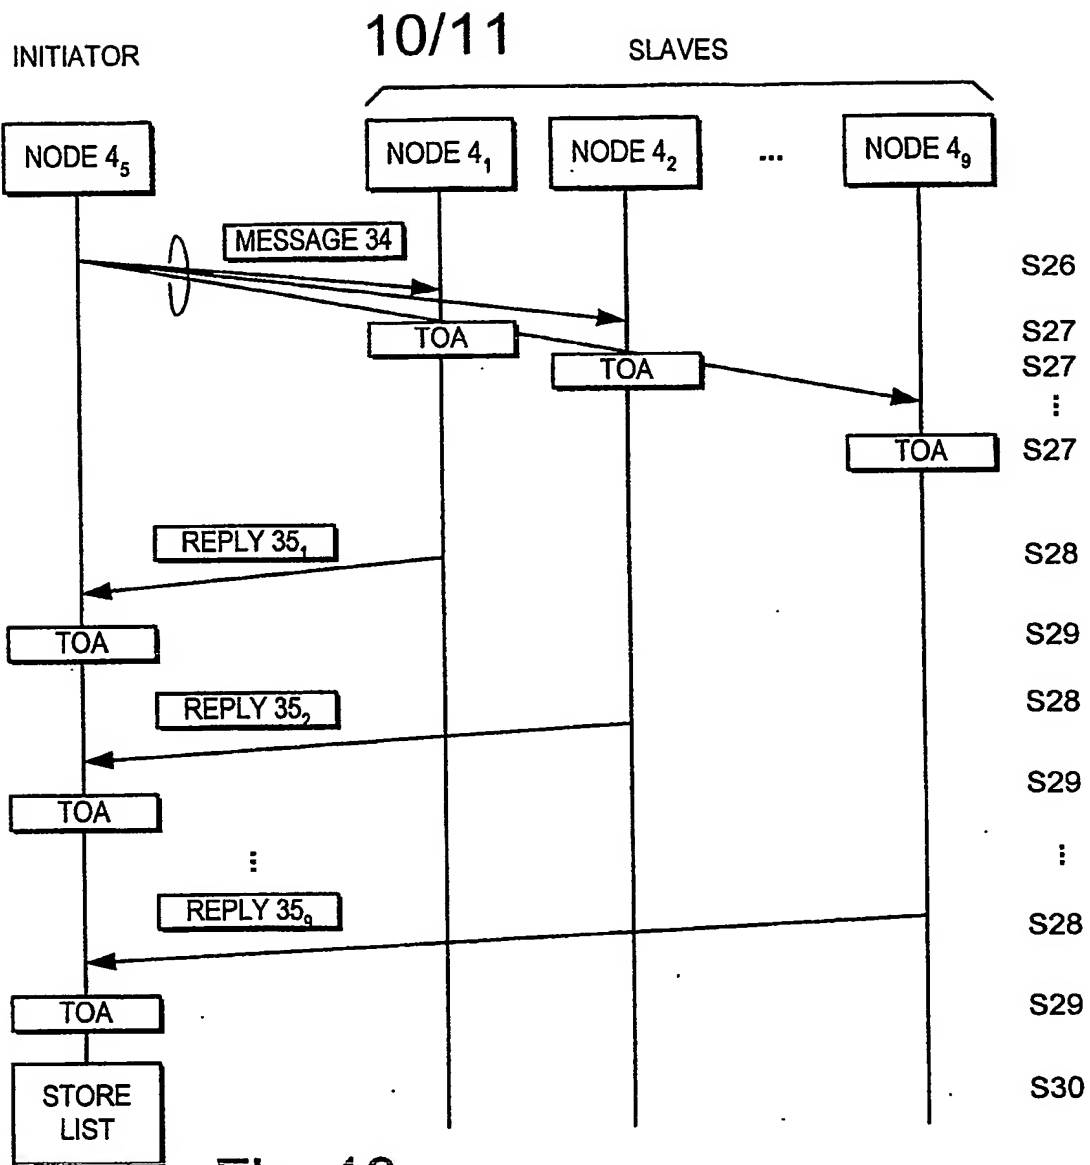


Fig. 19

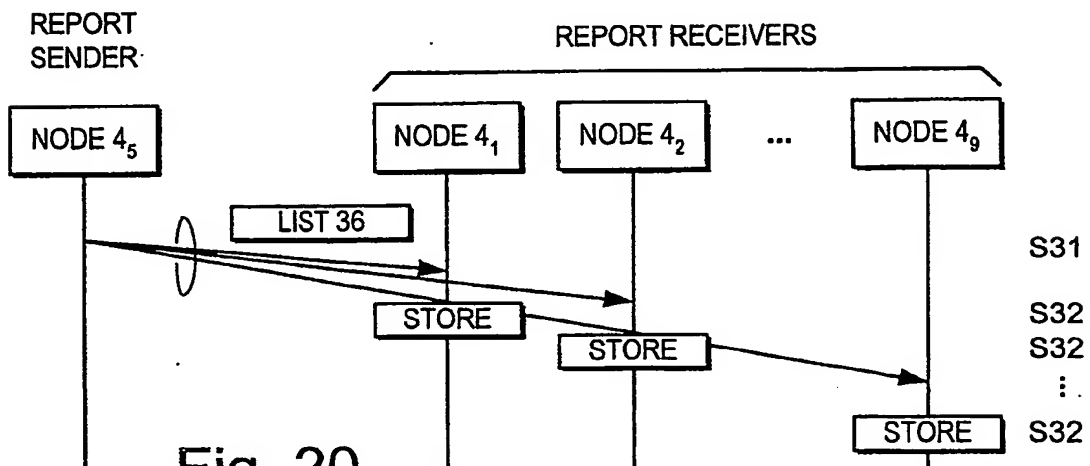


Fig. 20

11/11

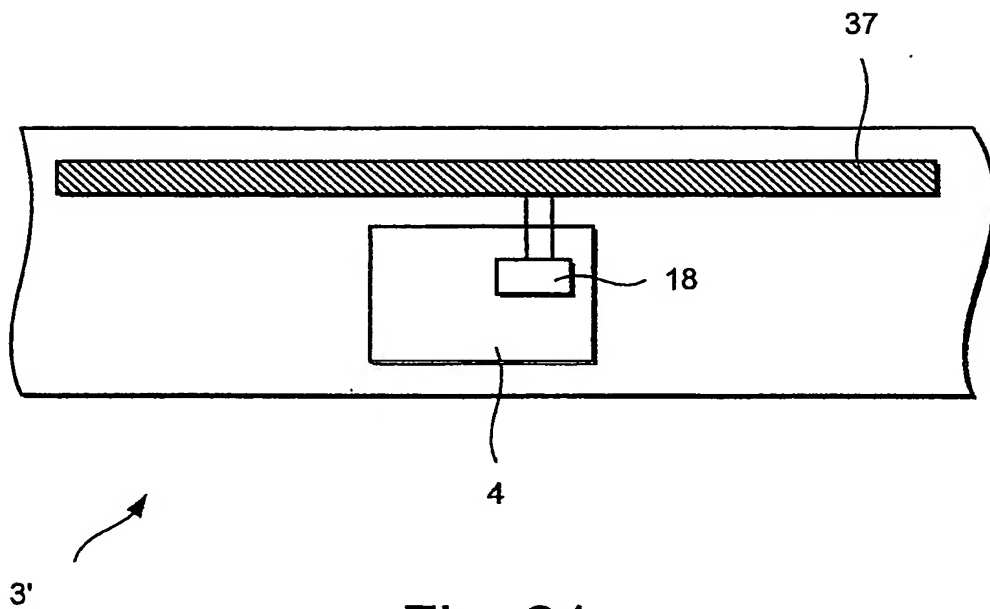


Fig. 21

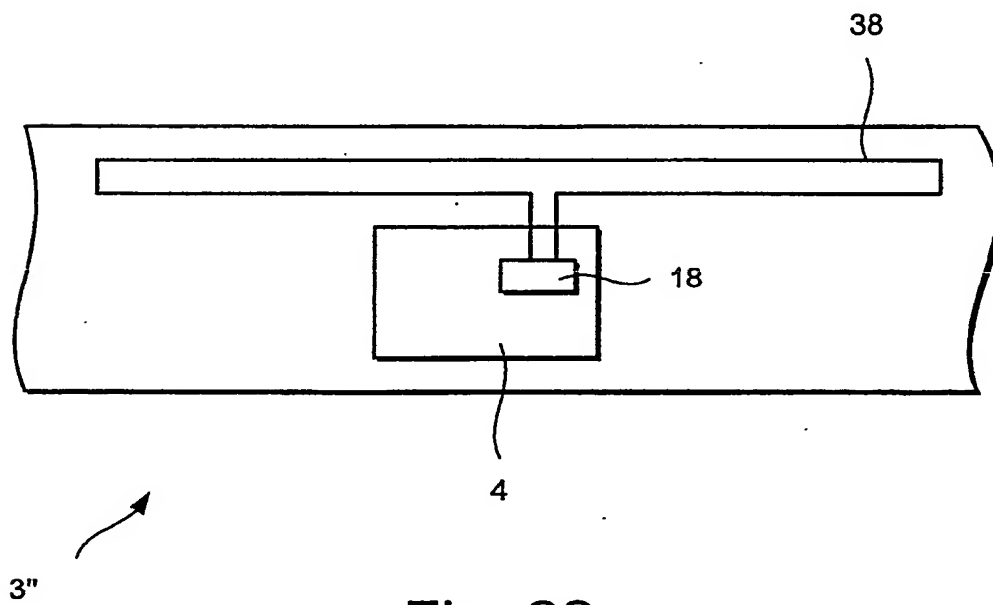


Fig. 22

PCT/IB2004/051841

